

Multi-Point Locking Handle for PVC-U
Casement Windows - McCoy EH-1



Multi-Point Locking Handle for PVC-U Casement Windows - McCoy EH-1

Highlights:

- · A Multi-Point Locking Handle for Outward opening PVC-U Windows. Can be used for Inward opening windows also.
- A stylishly curved L Shaped Zinc Alloy Die Cast Body.
- Suitable for most PVC-U profiles.
- · Ergonomic design and easy to operate with lesser
- Body made from the new family of Zinc-Aluminium based Die Casting Materials containing higher Aluminium than standard Zinc alloys characterized by high Strength and Hardness and good Bearing properties.
- · Total height of the handle 54 mm.
- Total length of the operating lever of the handle 138

- The Base width of the handle is 18mm.
- Spindle length is 40 mm.
- Spindle Cross Section is 7mm (+0.0/-0.1mm.)
- Standard package includes 2 nos. Fixing Screws M4 x 50mm. Long and Screw Cap.
- · Available in White or Black Powder Coating finish.
- · Coating thickness of 90 Microns.
- 24x7Technical Support.
- Guaranteed for 10 years
- Packing size 100 per box.





Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments


















Feature	Advantage	Benefit
Spindle length 40 mm.	The spindle will reach and cross the Espag, thus giving a proper grip to operate.	Suitable for most Profile – Espag combinations. No slippage while operating inside the Espag hole, so longer service life.
Coating thickness 90 µm	Colour does not fade / come off due to weather conditions or repeated gripping by hand.	Longer service life.
Base width 18 mm.	Can be used for outward opening windows when there is constrained space on sash for mounting the handle.	Suitable for use with most profiles.

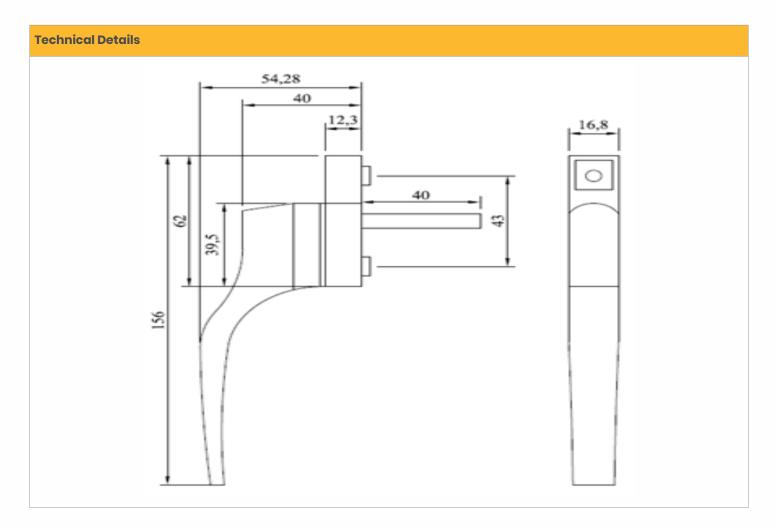

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments.



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355












A McCoy Group Company





WELCOME TO THE WORLD OF TECHNOLOGY

MCCOY PARTNER SELF SERVICE (PSS) APP

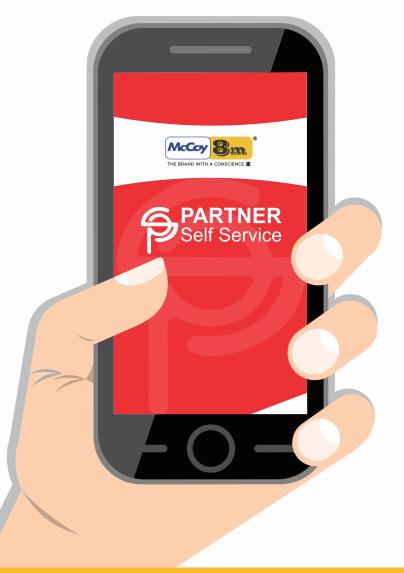

- Quick order
- Check order status
- Check account
- Loyalty rewards
- Product videos etc...

Download Now





Products available online on mccoymart.com

www.mccoy8m.in

(c) +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

info@mccoy8m.in | 8010-434-434











A McCoy Group Company

