

Multi-Point Locking Handle for PVC-U Casement Windows – McCoy PBHK-1



## Multi-Point Locking Handle for PVC-U Casement Windows - McCoy PBHK-1

#### **Highlights:**

- · A Multi-Point Locking Handle for Outward opening PVC-U Windows. Can be used for Inward opening
- A stylishly curved L Shaped Aluminium Zinc Alloy Die Cast Body.
- · Push Button with Key operation. Ideal for Schools, Hotels, Hospitals.
- · Suitable for most PVC-U profiles.
- · Ergonomic design and easy to operate with lesser effort.
- Body made from the new family of Zinc-Aluminium based Die Casting Materials containing higher Aluminium than standard Zinc alloys characterized by high Strength and Hardness and good Bearing properties.

- Total height of the handle 58 mm.
- · Total length of the handle 163.85 mm.
- The Base Width of the handle is 17 mm.
- Spindle length is 40 mm.
- Spindle Cross Section is 7mm (+0.0/-0.1mm.)
- · Available in White or Black Powder Coating finish.
- · Coating thickness of 90 Microns.
- 24x7Technical Support.
- Guaranteed for 10 years
- Packing size 80 per box.

Note: The Locking arrangement on this handle is meant purely as a child safety measure, and, should not be mis-construed as a barrier against an adult generated intrusion attempt.





Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments
















Tel: +91-11-40623344 | Fax: +91-11-40623355



Feature	Advantage	Benefit
Spindle length 40 mm.	The spindle will reach and cross the Espag, thus giving a proper grip to operate.	Suitable for most Profile – Espag combinations. No slippage while operating inside the Espag hole, so longer service life.
Coating thickness 90 µm	Colour does not fade / come off due to weather conditions or repeated gripping by hand.	Longer service life.
Base width 17 mm.	Can be used for outward opening windows when there is constrained space on sash for mounting the handle.	Suitable for use with most profiles.
Push Button and Key operation.	The handle cannot be opened inadvertently or by a child.	Enhanced safety. Ideal for Hotels, Hospitals, Schools where selective operability is required.

#### **Technical Details**

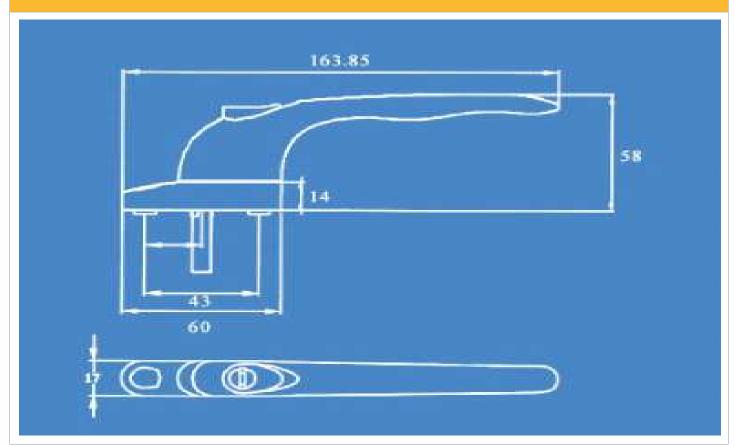

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments.



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

Tel: +91-11-40623344 | Fax: +91-11-40623355












A McCoy Group Company





### WELCOME TO THE WORLD OF TECHNOLOGY

# **MCCOY PARTNER SELF** SERVICE (PSS) APP

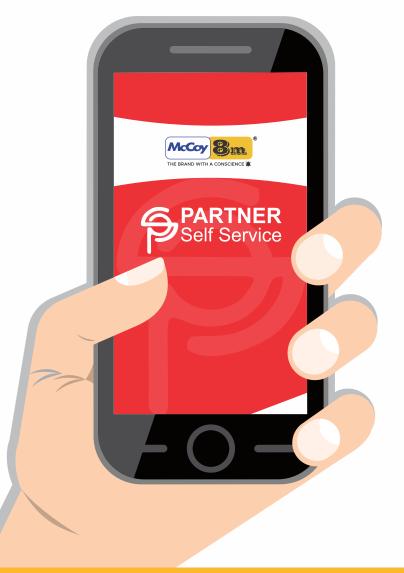

- Quick order
- Check order status
- Check account
- Loyalty rewards
- Product videos etc...

**Download Now** 





Products available online on mccoymart.com

www.mccoy8m.in

(c) +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

info@mccoy8m.in | 8010-434-434











A McCoy Group Company

